



STAINLESSLITE PLUS

UNVENTED MAINS PRESSURE
AND VENTED WATER
STORAGE CYLINDERS



ONE NAME. EVERY SOLUTION.

WWW.GLEDHILL.NET



BUILT ON EXPERIENCE

THE GLEDHILL BRAND HAS BEEN SYNONYMOUS WITH QUALITY MANUFACTURING AND EXPERTISE FOR ALMOST A CENTURY. OUR FLAGSHIP STAINLESSLITE PLUS RANGE BOASTS MORE THAN 70 MODELS AND IS THE RESULT OF CONTINUOUS PRODUCT DEVELOPMENT AND INNOVATION. IN FACT, WE'VE BEEN PRODUCING UNVENTED CYLINDERS SINCE THEIR VERY INCEPTION, SO REST ASSURED WE KNOW OUR STUFF.



CONTENTS

- 02. BUILT ON EXPERIENCE
- 04. RELIABILITY AND QUALITY
- 05. ONE NAME. EVERY SOLUTION
- 06. THE COMPLETE PACKAGE
- 07. WHAT SIZE CYLINDER DO I NEED?

STAINLESSLITE PLUS:

- 08. DIRECT & SLIMLINE
- 10. INDIRECT & SLIMLINE
- 12. HORIZONTAL INDIRECT
- 14. SOLAR DIRECT & SLIMLINE
- 16. SOLAR INDIRECT & SLIMLINE
- 18. HORIZONTAL SOLAR
- 20. HEAT PUMP & SLIMLINE
- 22. HEAT PUMP SOLAR
- 24. BUFFER STORE
- 26. FLEXIBLE BUFFER STORE


RELIABILITY AND QUALITY

IF YOU'RE INSTALLING GLEDHILL, YOU CAN BE CONFIDENT YOU'RE INSTALLING QUALITY. MANUFACTURED FROM HIGH SPECIFICATION DUPLEX STAINLESS STEEL, OUR STAINLESSLITE PLUS RANGE IS DESIGNED TO RESIST ALL FORMS OF CORROSION, INCLUDING CREVICE AND STRESS.

Its high mechanical strength promises durability, while automated welding procedures, post weld pickling and passivating treatment guarantee each individual weld is as strong as its parent metal.

Our StainlessLite Plus cylinders are pressure tested to a full 12 bar - four times their normal working pressure - and injected with 50mm of our HCFC free EnviroFoam insulation to achieve astonishingly low levels of heat loss, which maximises energy efficiency for your customers.

In addition, all our StainlessLite Plus cylinders come with a 25 year warranty, promising peace of mind.

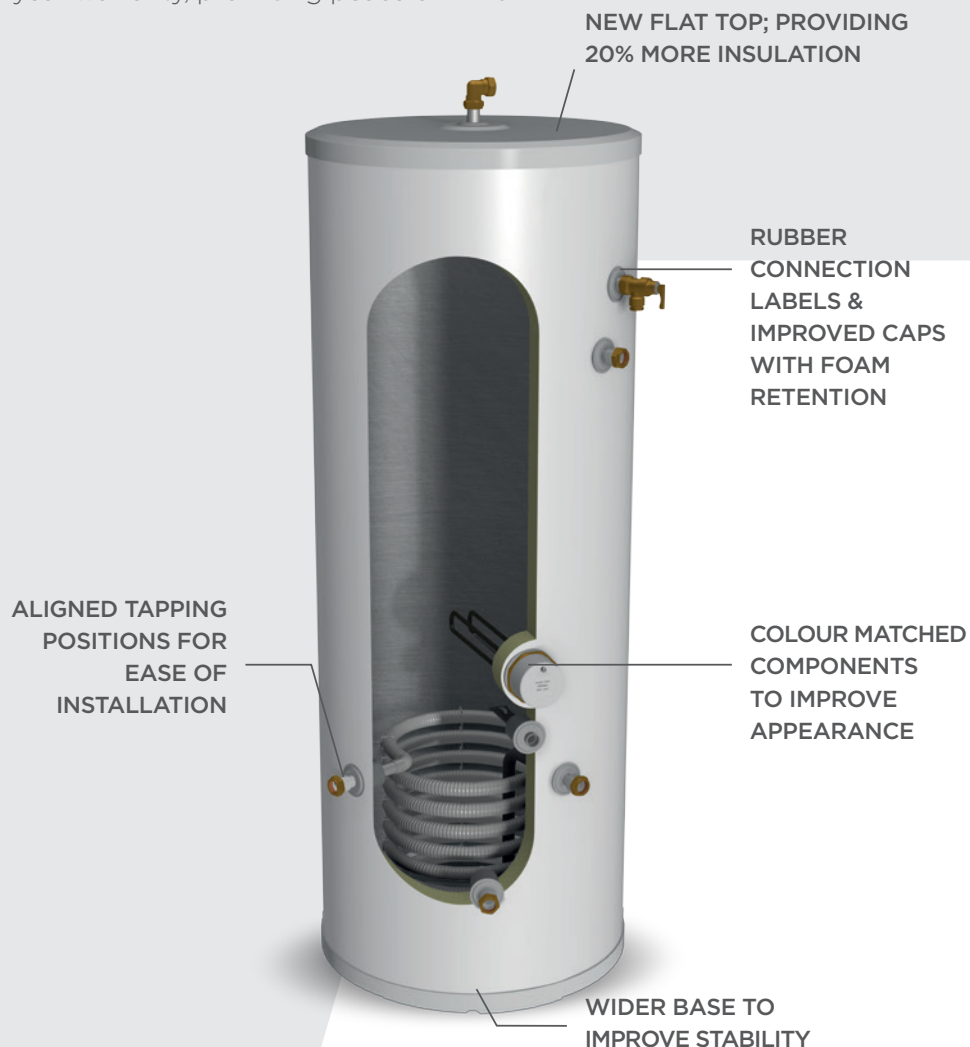

ONE NAME. EVERY SOLUTION

OUR STAINLESSLITE PLUS RANGE IS AVAILABLE IN DIRECT AND INDIRECT PATTERNS, AND IN SIZES FROM 60 LITRES UP TO 400 LITRES. THE RANGE ALSO INCLUDES A SELECTION OF CYLINDERS COMPATIBLE WITH SOLAR THERMAL, HEAT PUMPS OR A COMBINATION OF BOTH.

Struggling for space? Try the StainlessLite Plus slimline or the StainlessLite Plus horizontal cylinder; one of the first domestic horizontal unvented cylinders to gain NSF approval.

Whatever the task, whatever your requirements, we've got a cylinder to suit.



LIGHTEST CYLINDER
ON THE MARKET

LIGHTER AND EASIER
TO HANDLE THAN
OTHER CYLINDERS, THE
STAINLESSLITE PLUS IS
THE LIGHTEST CYLINDER
ON THE MARKET.



25 YEAR
WARRANTY



GAS OR OIL
BOILERS



IMMERSION
HEATER



SOLID
FUEL



SOLAR
PHOTOVOLTAIC



SOLAR
THERMAL



AIR OR
GROUND SOURCE
HEAT PUMPS



G STAINLESSLITE

G GLEDHILL

THE COMPLETE PACKAGE

MANY OF OUR STAINLESSLITE PLUS PRODUCTS ARE SUPPLIED WITH ALL THE FITTINGS YOU'LL NEED TO COMPLETE THE INSTALLATION - JUST ADD THE PIPEWORK.

	Direct models	Indirect models	Solar direct models	Solar indirect models	Heat pump models
Inlet control group	•	•	•	•	•
Pressure and temperature relief valve	•	•	•	•	•
Tundish	•	•	•	•	•
3kW immersion heater (main heat source)	•				
3kW immersion heater (back up heat source)	•	•	•	•	•
Expansion vessel c/w flexible hose and bracket	•	•	•	•	•
Two port valve		•		•	•
Dual control and combined overheat thermostat		•	•	•	•
Wiring junction box		•		•	•
Installation manual	•	•	•	•	•



WHAT SIZE CYLINDER DO I NEED?

WHEN CALCULATING THE CORRECT SIZED HOT WATER CYLINDER REQUIRED FOR A TYPICAL DOMESTIC HOUSEHOLD, A SIMPLE RULE OF THUMB IS TO ALLOW BETWEEN 35 AND 45 LITRES FOR EVERY OCCUPANT.

Here's a simple guide to the minimum cylinder size required to meet demand - remember to consider your clients' future hot water demands too, such as additional people, additional outlets etc.

Hot water demand	Bedrooms	Indirect unit size	Direct unit size
1 standard bath or shower	bedsit / 1 bed	60/90	150
	2 - 3 bed	120	180
	3 - 4 bed	150	210
1 standard bath	2 - 3 bed	120	180
	3 - 4 bed	150	210
1 standard bath and 1 en-suite	2 - 3 bed	150	210
	3 - 4 bed	150	210
	4 - 5 bed	180	250
2 standard baths	2 - 3 bed	180	210
	3 - 4 bed	180	210
	4 - 5 bed	210	250
3 standard baths	2 - 3 bed	250	300
	3 - 4 bed	300	400
	4 - 5 bed	400	400

If you're utilising a renewable energy source, you'll need to consider not just the lower temperature input, such as from a heat pump, but also the constant availability of that heat source with solar thermal.

STAINLESSLITE PLUS

DIRECT

60 | 90 | 120 | 150 | 180 | 210 | 250 | 300 | 400 LITRES



KEY FEATURES

- Designed for use with electricity either from mains supply or photovoltaic panels
- Suitable for use with economy electricity tariffs to maximise efficiency
- 3kW incoloy 825 immersion heater for use as a primary heat source
- 3kW incoloy 825 immersion heater for emergency back-up
- 90° elbow, flexihose and drain valve supplied as standard
- Standard and slimline models available



25 YEAR WARRANTY



LIGHTEST CYLINDER ON THE MARKET




SOLAR PHOTOVOLTAIC



IMMERSION HEATER

TECHNICAL SPECIFICATION

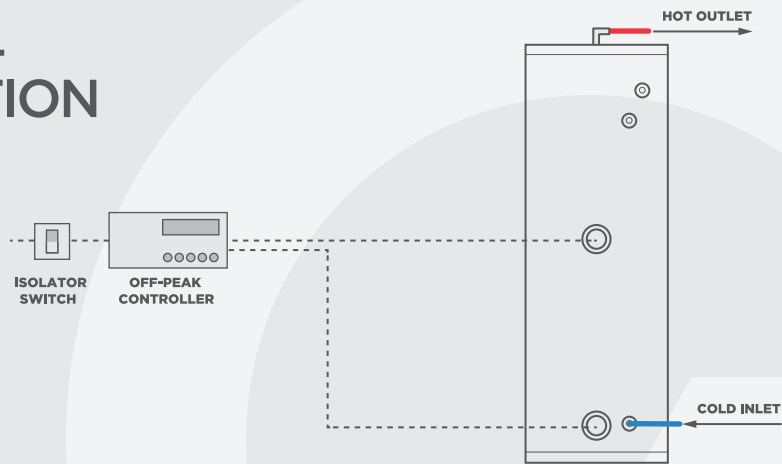

STAINLESSLITE PLUS DIRECT

Description		D90	D120	D150	D180	D210	D250	D300	D400
Product stock code		PLUDR090	PLUDR120	PLUDR150	PLUDR180	PLUDR210	PLUDR250	PLUDR300	PLUDR400
ErP rating		D	D	D	D	D	D	D	D
Heat loss	watts	32	39	47	55	62	74	86	118
Capacity	litres	91	119	148	178	208	248	287	400
Height	mm	764	931	1118	1306	1494	1744	1990	2030
Diameter	mm	550	550	550	550	550	550	550	630
Weight (empty)	kg	18	21	25	28	32	36	41	48
Weight (full)	kg	109	140	173	206	240	284	328	448
Heat up time	min	90	119	150	179	209	249	299	398/198
Number of immersions		1	2	2	2	2	2	2	3
Secondary return		No	No	No	No	Yes	Yes	Yes	Yes

STAINLESSLITE PLUS SLIMLINE DIRECT

Description		D60-SL	D90-SL	D120-SL	D150-SL	D180-SL	D210-SL
Product stock code		PLUDR060SL	PLUDR090SL	PLUDR120SL	PLUDR150SL	PLUDR180SL	PLUDR210SL
ErP rating		D	D	D	D	D	D
Heat loss	watts	28	36	47	56	67	74
Capacity	litres	59	88	120	149	181	197
Height	mm	704	976	1248	1519	1791	1963
Diameter	mm	475	475	475	475	475	475
Weight (empty)	kg	14	18	23	27	31	34
Weight (full)	kg	73	106	143	176	212	231
Heat up time	min	60	90	119	150	179	209
Number of immersions		1	1	2	2	2	2
Secondary return		No	No	No	No	No	Yes

NOTES:

- 1 The heat up times shown for the D400 model indicate the times when 1 or 2 immersions are fitted
- 2 Heat up time from 15°C to 60°C (applies to primary heat source only)
- 3 For further ErP information, please refer to the installation manual at www.gledhill.net
- 4 The schematics shown above are representational, please refer to the installation manual for full technical requirements

STAINLESSLITE PLUS

INDIRECT

60 | 90 | 120 | 150 | 180 | 210 | 250 | 300 | 400 LITRES



**STAINLESSLITE PLUS
INDIRECT NOW B-RATED
UP TO 210L**

KEY FEATURES

- Designed for use with gas or oil boilers, either sealed system or open vented
- High efficiency corrugated coil maximises heat transfer to the cylinder of water
- Corrugated coil provides faster reheat times compared to plain coil
- 3kW incoloy immersion heater for emergency back-up
- 90° elbow, flexihose and drain valve supplied as standard
- Standard and slimline models available



25 YEAR
WARRANTY



LIGHTEST CYLINDER
ON THE MARKET




GAS OR OIL
BOILERS



IMMERSION
HEATER

TECHNICAL SPECIFICATION

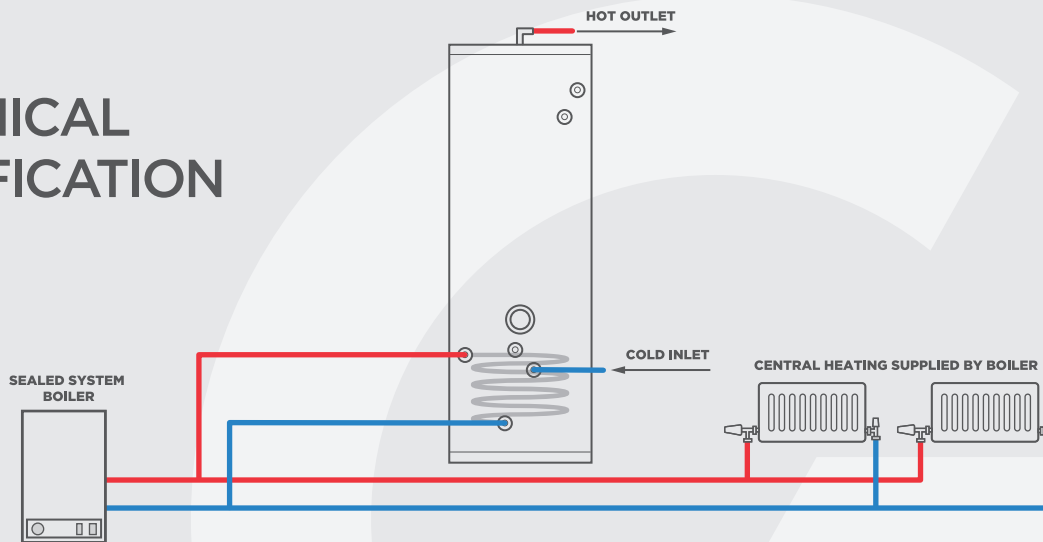

STAINLESSLITE PLUS INDIRECT

Description		IND90	IND120	IND150	IND180	IND210	IND250	IND300	IND400
Product stock code		PLUIN090	PLUIN120	PLUIN150	PLUIN180	PLUIN210	PLUIN250	PLUIN300	PLUIN400
ErP rating		A	B	B	B	B	C	C	D
Heat loss	watts	32	39	47	55	62	74	86	118
Capacity	litres	91	119	148	178	208	248	287	400
Height	mm	764	931	1118	1306	1494	1744	1990	2030
Diameter	mm	550	550	550	550	550	550	550	630
Weight (empty)	kg	20	23	26	30	33	38	43	55
Weight (full)	kg	111	142	174	208	241	286	330	455
Heat up time	min	17	21	25	30	32	36	38	41
Number of immersions		1	1	1	1	1	2	2	2
Secondary return		No	No	No	No	Yes	Yes	Yes	Yes

STAINLESSLITE PLUS SLIMLINE INDIRECT

Description		IND60-SL	IND90-SL	IND120-SL	IND150-SL	IND180-SL	IND210-SL
Product stock code		PLUIN060SL	PLUIN090SL	PLUIN120SL	PLUIN150SL	PLUIN180SL	PLUIN210SL
ErP rating		A	B	B	C	C	C
Heat loss	watts	28	36	47	56	67	74
Capacity	litres	59	88	120	149	181	197
Height	mm	704	976	1248	1519	1791	1963
Diameter	mm	475	475	475	475	475	475
Weight (empty)	kg	16	20	24	28	32	35
Weight (full)	kg	75	108	144	177	213	232
Heat up time	min	13	17	21	25	30	32
Number of immersions		1	1	1	1	1	1
Secondary return		No	No	No	No	No	Yes

NOTES:

- 1 Heat up time from 15°C to 60°C (applies to primary heat source only)
- 2 For further ErP information, please refer to the installation manual at www.gledhill.net
- 3 The schematics shown above are representational, please refer to the installation manual for full technical requirements

STAINLESSLITE PLUS HORIZONTAL INDIRECT

180 | 210 | 250 | 300 LITRES

KEY FEATURES

- One of the first independently approved domestic horizontal unvented cylinders
- Provides the ideal solution for height restricted installation spaces
- Designed for use with gas or oil boilers
- High efficiency corrugated coil maximises heat transfer to the cylinder of water
- 3kW incoloy immersion heater for emergency back-up



25 YEAR
WARRANTY



LIGHTEST CYLINDER
ON THE MARKET




GAS OR OIL
BOILERS



IMMERSION
HEATER

TECHNICAL SPECIFICATION

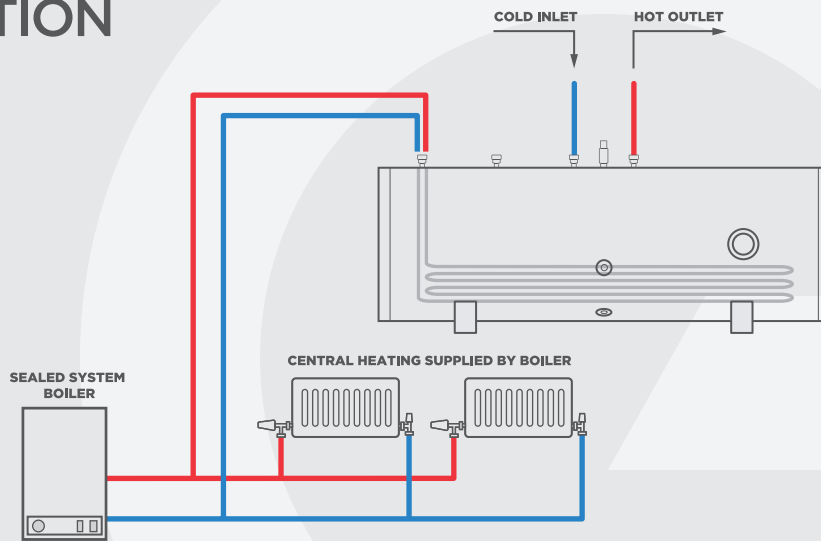

STAINLESSLITE PLUS HORIZONTAL INDIRECT

Description		IND180	IND210	IND250	IND300
Product stock code		PLUIN180H	PLUIN210H	PLUIN250H	PLUIN300H
ErP rating		C	C	C	C
Heat loss	watts	78	82	86	91
Capacity	litres	172	206	244	288
Overall height	mm	588	588	588	588
Overall width	mm	1306	1494	1744	1990
Diameter	mm	550	550	550	550
Weight (empty)	kg	29	31	35	46
Weight (full)	kg	201	237	279	334
Heat up time	min	27	27	36	32
Number of immersions		1	1	2	2
Secondary return		Yes	Yes	Yes	Yes

NOTES:

- 1 Heat up time from 15°C to 60°C (applies to primary heat source only)
- 2 For further ErP information, please refer to the installation manual at www.gledhill.net
- 3 The schematics shown above are representational, please refer to the installation manual for full technical requirements

STAINLESSLITE PLUS SOLAR DIRECT

180 | 210 | 250 | 300 | 400 LITRES



**STAINLESSLITE PLUS
SOLAR DIRECT NOW
B-RATED UP TO 210L**

KEY FEATURES

- Specifically designed for use with solar thermal panels
- Corrugated coil to maximise the heat transfer from the solar input
- 3kW incoloy 825 immersion heater for use as a secondary heat source when required
- 3kW incoloy immersion heater for emergency back-up
- 90° elbow, flexihose and drain valve supplied as standard
- Standard and slimline models available



25 YEAR
WARRANTY



LIGHTEST CYLINDER
ON THE MARKET




SOLAR
THERMAL



IMMERSION
HEATER

TECHNICAL SPECIFICATION

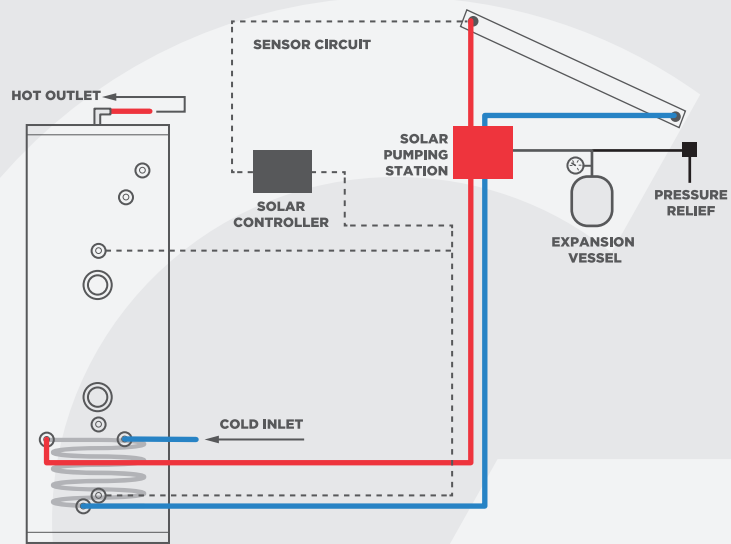

STAINLESSLITE PLUS SOLAR DIRECT

Description		SOL180d	SOL210d	SOL250d	SOL300d	SOL400d
Product stock code		PLUDR180S	PLUDR210S	PLUDR250S	PLUDR300S	PLUDR400S
ErP rating		B	B	C	C	D
Heat loss	watts	55	62	74	86	118
Capacity	litres	178	208	248	287	400
Height	mm	1306	1494	1744	1990	2030
Diameter	mm	550	550	550	550	630
Weight (empty)	kg	30	34	39	43	49
Weight (full)	kg	208	242	287	330	449
Heat up time	min	n/a	n/a	n/a	n/a	n/a
Dedicated solar volume	litres	60	70	84	100	150
Number of immersions		2	2	2	2	2
Secondary return		No	Yes	Yes	Yes	Yes

STAINLESSLITE PLUS SOLAR SLIMLINE DIRECT

Description		SOL 180d-SL	SOL 210d-SL
Product stock code		PLUDR180SSL	PLUDR210SSL
ErP rating		C	C
Heat loss	watts	67	74
Capacity	litres	181	197
Height	mm	1791	1963
Diameter	mm	475	475
Weight (empty)	kg	34	36
Weight (full)	kg	215	233
Heat up time	min	n/a	n/a
Dedicated solar volume	litres	60	70
Number of immersions		2	2
Secondary return		No	Yes

NOTES:

- 1 The dedicated solar volume is the amount of water that cannot be heated by any other heat source in line with ADL1 Compliance
- 2 Heat up time from 15°C to 60°C (applies to primary heat source only)
- 3 For further ErP information, please refer to the installation manual at www.gledhill.net
- 4 The schematics shown above are representational, please refer to the installation manual for full technical requirements

STAINLESSLITE PLUS SOLAR INDIRECT

180 | 210 | 250 | 300 | 400 LITRES



**STAINLESSLITE PLUS
SOLAR INDIRECT NOW
B-RATED UP TO 210L**

KEY FEATURES

- Specifically designed for use with solar thermal panels in addition to gas or oil boilers
- High efficiency corrugated coil maximises heat transfer from the solar input
- 3kW incoloy immersion heater for emergency back-up
- 90° elbow, flexihose and drain valve supplied as standard
- Standard and slimline models available



**25
YEAR
WARRANTY**



**LIGHTEST CYLINDER
ON THE MARKET**



**GAS OR OIL
BOILERS**




**SOLAR
THERMAL**



**IMMERSION
HEATER**

TECHNICAL SPECIFICATION

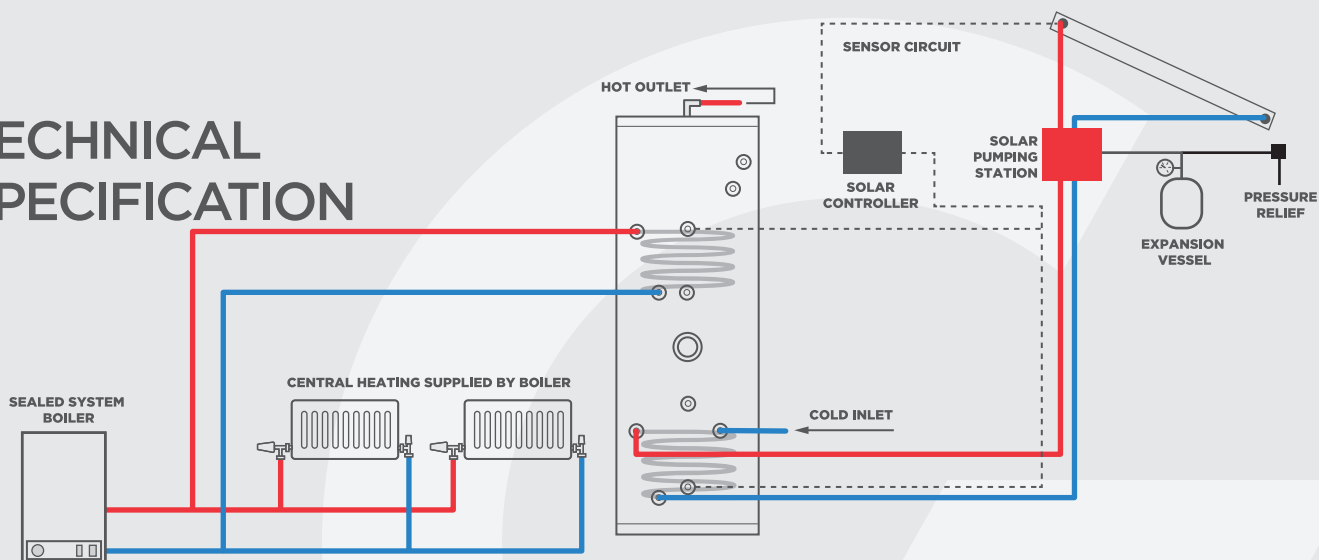

STAINLESSLITE PLUS SOLAR INDIRECT

Description		SOL180i	SOL210i	SOL250i	SOL300i	SOL400i
Product stock code		PLUIN180S	PLUIN210S	PLUIN250S	PLUIN300S	PLUIN400S
ErP rating		B	B	C	C	D
Heat loss	watts	55	62	74	86	118
Capacity	litres	178	208	248	287	400
Height	mm	1306	1494	1744	1990	2030
Diameter	mm	550	550	550	550	630
Weight (empty)	kg	31	35	40	44	59
Weight (full)	kg	209	243	288	331	459
Heat up time	min	28	35	38	41	45
Dedicated solar volume	litres	96	101	107	125	165
Number of immersions		1	1	1	1	1
Secondary return		No	Yes	Yes	Yes	Yes

STAINLESSLITE PLUS SOLAR SLIMLINE INDIRECT

Description		SOL180i-SL	SOL210i-SL
Product stock code		PLUIN180SSL	PLUIN210SSL
ErP rating		C	C
Heat loss	watts	67	74
Capacity	litres	181	197
Height	mm	1791	1963
Diameter	mm	475	475
Weight (empty)	kg	34	36
Weight (full)	kg	215	233
Heat up time	min	28	35
Dedicated solar volume	litres	60	70
Number of immersions		1	1
Secondary return		No	Yes

NOTES:

- 1 The dedicated solar volume is the amount of water that cannot be heated by any other heat source in line with ADL1 Compliance
- 2 Heat up time from 15°C to 60°C (applies to primary heat source only)
- 3 For further ErP information, please refer to the installation manual at www.gledhill.net
- 4 The schematics shown above are representational, please refer to the installation manual for full technical requirements

STAINLESSLITE PLUS HORIZONTAL SOLAR

180 | 210 | 250 | 300 LITRES

KEY FEATURES

- One of the first independently approved domestic horizontal unvented cylinders
- Provides the ideal solution for height restricted installation spaces
- Specifically designed for use with solar thermal panels in addition to gas or oil boilers
- 3kW incoloy immersion heater for emergency back-up



25 YEAR
WARRANTY



LIGHTEST CYLINDER
ON THE MARKET



GAS OR OIL
BOILERS




SOLAR
THERMAL



IMMERSION
HEATER

TECHNICAL SPECIFICATION

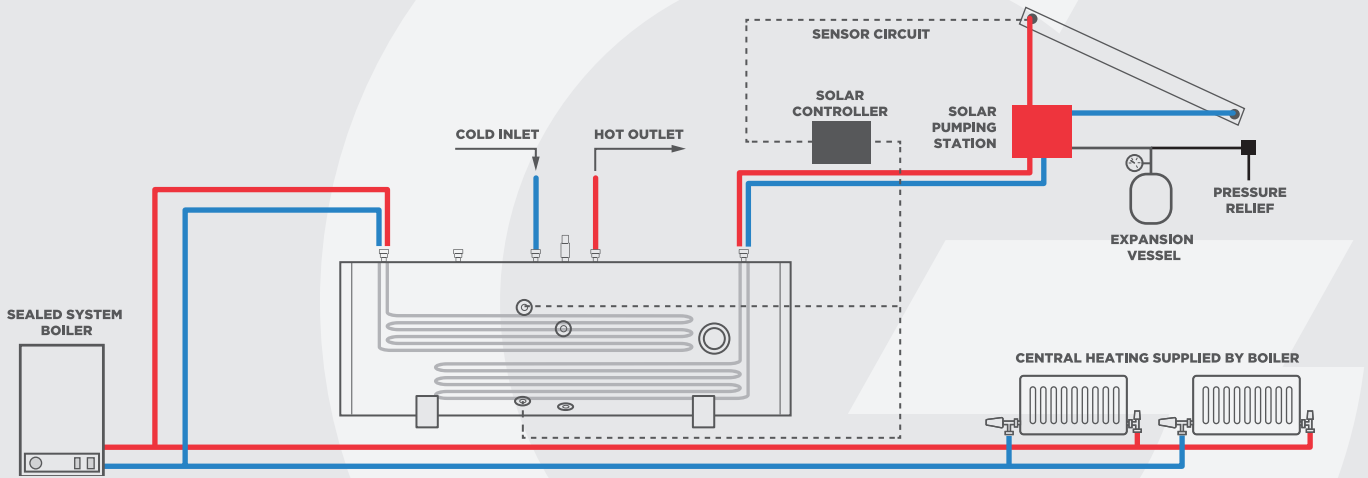

STAINLESSLITE PLUS HORIZONTAL SOLAR

Description		IND180 SOL	IND210 SOL	IND250 SOL	IND300 SOL
Product stock code		PLUIN180SH	PLUIN210SH	PLUIN250SH	PLUIN300SH
ErP rating		C	C	C	C
Heat loss	watts	78	82	86	91
Capacity	litres	170	204	244	287
Overall height	mm	588	588	588	588
Overall width	mm	1306	1494	1744	1990
Diameter	mm	550	550	550	550
Weight (empty)	kg	29	31	34	45
Weight (full)	kg	199	235	278	332
Heat up time	min	21	24	38	26
Dedicated solar volume	litres	64	85	112	145
Number of immersions		1	1	1	1
Secondary return		Yes	Yes	Yes	Yes

NOTES:

- 1 The dedicated solar volume is the amount of water that cannot be heated by any other heat source in line with ADL1 Compliance
- 2 Heat up time from 15°C to 60°C (applies to primary heat source only)
- 3 For further ErP information, please refer to the installation manual at www.gledhill.net
- 4 The schematics shown above are representational, please refer to the installation manual for full technical requirements

STAINLESSLITE PLUS HEAT PUMP

180 | 210 | 250 | 300 | 400 LITRES



**STAINLESSLITE PLUS
HEAT PUMP NOW
B-RATED UP TO 210L**

KEY FEATURES

- Designed for use with either air source or ground source heat pumps
- High efficiency corrugated coil maximises heat transfer to the cylinder of water
- 3kW incoloy immersion heater for emergency back-up
- 90° elbow, flexihose and drain valve supplied as standard
- Standard and slimline models available



25 YEAR
WARRANTY



LIGHTEST CYLINDER
ON THE MARKET




IMMERSION
HEATER



AIR OR
GROUND SOURCE
HEAT PUMPS

TECHNICAL SPECIFICATION

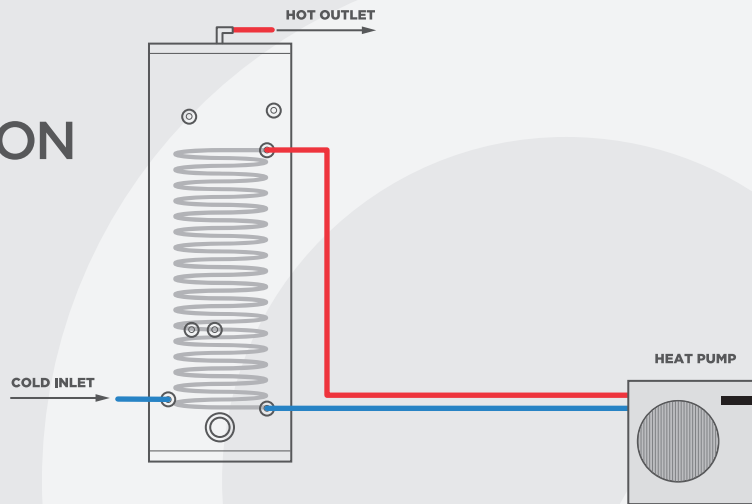

STAINLESSLITE PLUS HEAT PUMP

Description		HP180IND	HP210IND	HP250IND	HP300IND	HP400IND
Product stock code		PLUHP180	PLUHP210	PLUHP250	PLUHP300	PLUHP400
ErP rating		B	B	C	C	D
Heat loss	watts	55	62	74	86	118
Capacity	litres	178	208	248	287	400
Height	mm	1306	1494	1744	1990	2030
Diameter	mm	550	550	550	550	630
Weight (empty)	kg	34	38	43	47	62
Weight (full)	kg	212	246	291	334	462
Surface area of HP coil	m ²	2.5	3	3	3	4
Number of immersions		1	1	1	1	1
Secondary return		No	Yes	Yes	Yes	Yes

STAINLESSLITE PLUS SLIMLINE HEAT PUMP

Description		HP180SL	HP210SL
Product stock code		PLUHP180SL	PLUHP210SL
ErP rating		C	C
Heat loss	watts	67	74
Capacity	litres	181	197
Height	mm	1791	1963
Diameter	mm	475	475
Weight (empty)	kg	38	40
Weight (full)	kg	219	237
Surface area of HP coil	m ²	3	3
Number of immersions		1	1
Secondary return		No	Yes

NOTES:

- 1 For further ErP information, please refer to the installation manual at www.gledhill.net
- 2 The schematics shown above are representational, please refer to the installation manual for full technical requirements

STAINLESSLITE PLUS HEAT PUMP SOLAR

180 | 210 | 250 | 300 | 400 LITRES



KEY FEATURES

- Designed for use with either air source or ground source heat pumps in addition to solar thermal panels
- High efficiency corrugated coil maximises heat transfer to the cylinder of water
- 3kW incoloy immersion heater for emergency back-up
- 90° elbow, flexihose and drain valve supplied as standard



25 YEAR
WARRANTY



LIGHTEST CYLINDER
ON THE MARKET



IMMERSION
HEATER




AIR OR
GROUND SOURCE
HEAT PUMPS



SOLAR
THERMAL

TECHNICAL SPECIFICATION

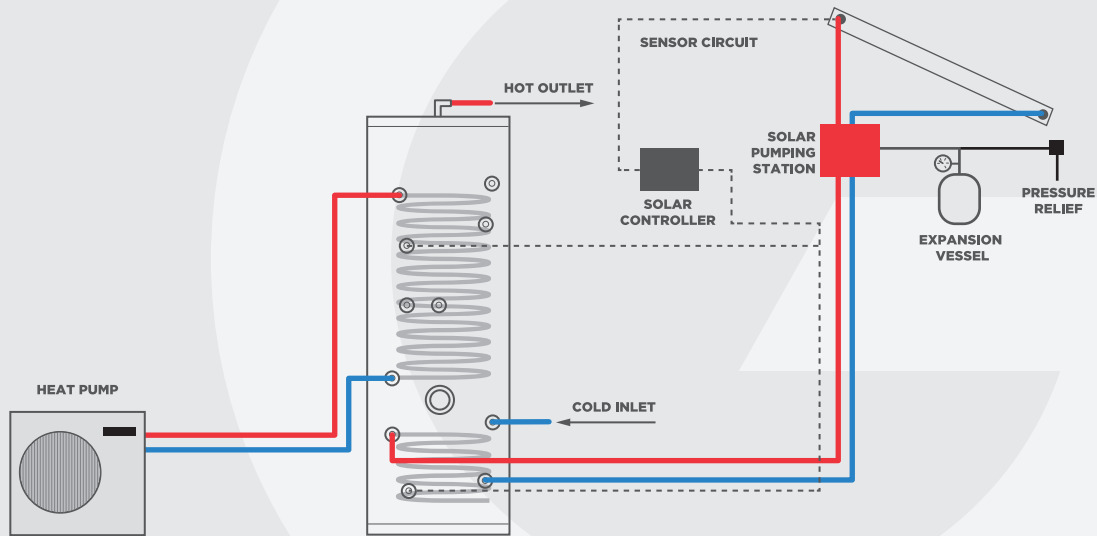

STAINLESSLITE PLUS HEAT PUMP SOLAR

Description		HP180INDSOL	HP210INDSOL	HP250INDSOL	HP300INDSOL	HP400INDSOL
Product stock code		PLUHP180S	PLUHP210S	PLUHP250S	PLUHP300S	PLUHP400S
ErP rating		B	B	C	C	D
Heat loss	watts	55	62	74	86	118
Capacity	litres	178	208	248	287	400
Height	mm	1306	1494	1744	1990	2030
Diameter	mm	550	550	550	550	630
Weight (empty)	kg	33	37	44	48	61
Weight (full)	kg	211	245	292	335	461
Surface area of HP coil	m ²	1.36	1.56	1.94	2.04	2.91
Dedicated solar volume	litres	63.5	74	88	102	130
Number of immersions		1	1	1	1	1
Secondary return		No	Yes	Yes	Yes	Yes

NOTES:

- 1 For further ErP information, please refer to the installation manual at www.gledhill.net
- 2 The schematics shown above are representational, please refer to the installation manual for full technical requirements

STAINLESSLITE PLUS BUFFER STORE

90 | 120 | 210 | 300 | 400 LITRES



**STAINLESSLITE PLUS
BUFFER STORE NOW
B-RATED UP TO 210L**

KEY FEATURES

- Open vented duplex stainless steel cylinder in direct or indirect models
- Buffer stores increase the overall volume of the heating distribution system, and reduce the cycling of the heat pump
- Designed for use with either air source or ground source heat pumps
- Indirect models for use with gas or oil boilers, utilise a high efficiency corrugated coil to maximise heat transfer



25 YEAR
WARRANTY



LIGHTEST CYLINDER
ON THE MARKET




GAS OR OIL
BOILERS



AIR OR
GROUND SOURCE
HEAT PUMPS

TECHNICAL SPECIFICATION

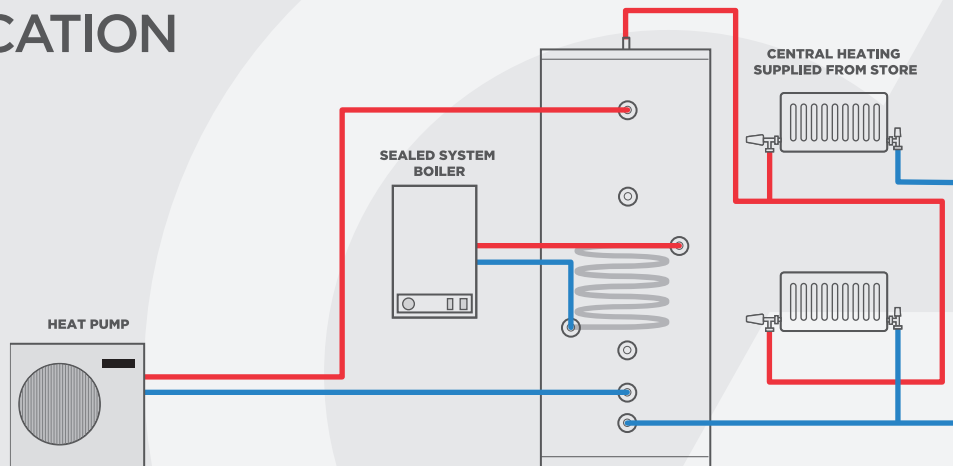

STAINLESSLITE PLUS DIRECT BUFFER STORE

Description		90D	120D	210D	300D	400D
Product stock code		PLUDR090B	PLUDR120B	PLUDR210B	PLUDR300B	PLUDR400B
ErP rating		A	B	B	C	D
Heat loss	watts	32	39	62	86	118
Capacity	litres	91	119	208	287	400
Height	mm	764	931	1494	1990	2030
Diameter	mm	550	550	550	550	630
Weight (empty)	kg	17	20	30	39	51
Weight (full)	kg	108	139	238	326	451

STAINLESSLITE PLUS INDIRECT BUFFER STORE

Description		120IND	210IND	300IND	400IND
Product stock code		PLUIN120B	PLUIN210B	PLUIN300B	PLUIN400B
ErP rating		B	B	C	D
Heat loss	watts	39	62	86	118
Capacity	litres	119	208	287	400
Height	mm	931	1494	1990	2030
Diameter	mm	550	550	550	630
Weight (empty)	kg	22	32	41	55
Weight (full)	kg	141	240	328	455

NOTES:

- 1 For further ErP information, please refer to the installation manual at www.gledhill.net
- 2 The schematics shown above are representational, please refer to the installation manual for full technical requirements

STAINLESSLITE PLUS

FLEXIBLE BUFFER STORE

90 | 120 | 210 | 250 | 300 | 400 LITRES



**STAINLESSLITE PLUS
FLEXIBLE BUFFER STORE
NOW B-RATED UP TO 210L**

KEY FEATURES

- Open vented duplex stainless steel cylinder
- Provides connections for multiple inputs
- Suitable for use with air source or ground source heat pumps, wood burning stoves or open vented boilers
- Designed to directly supply the heating circuit
- Works up to 3.5 bar pressure
- 90° elbow, flexihose and drain valve supplied as standard



25 YEAR
WARRANTY



LIGHTEST CYLINDER
ON THE MARKET



GAS OR OIL
BOILERS




AIR OR
GROUND SOURCE
HEAT PUMPS



SOLID
FUEL

TECHNICAL SPECIFICATION

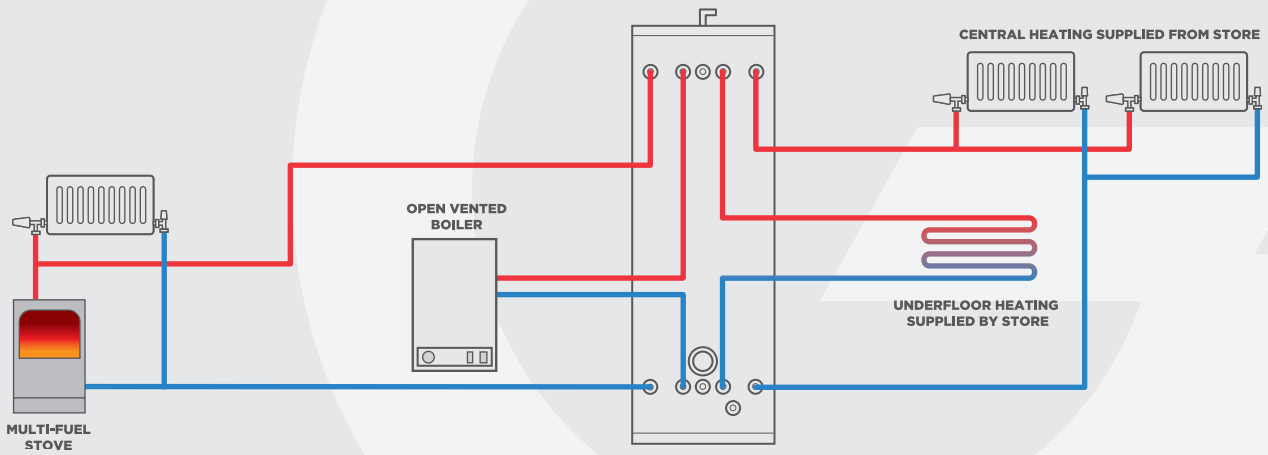

STAINLESSLITE PLUS FLEXIBLE BUFFER STORE

Description		90FLX	120FLX	210FLX	250FLX	300FLX	400FLX
Product stock code		PLU090MB	PLU120MB	PLU210MB	PLU250MB	PLU300MB	PLU400MB
ErP rating		A	B	B	C	C	D
Heat loss	watts	32	39	62	74	86	118
Capacity	litres	91	119	208	248	287	400
Height	mm	764	931	1494	1744	1990	2030
Diameter	mm	550	550	550	550	550	630
Weight (empty)	kg	18	21	30	34	39	51
Weight (full)	kg	109	140	238	282	326	451

NOTES:

- 1 For further ErP information, please refer to the installation manual at www.gledhill.net
- 2 The schematics shown above are representational, please refer to the installation manual for full technical requirements

SPARES

Gledhill cylinders are manufactured to the highest quality standards. In the unlikely event that you require a spare part, you can contact Gledhill Spare Parts, on:

01253 474412

or visit www.gledhill-spares.net

HERE TO HELP

If you're looking for technical assistance while you're on the job, give our technical team a call. With many years' experience, they're an invaluable resource to have at the end of the phone.

FOR TECHNICAL
ADVICE PLEASE CALL
01253 474584



Gledhill Building Products Limited
Sycamore Estate,
Squires Gate,
Blackpool FY4 3RL

T: 01253 474550
E: enquiries@gledhill.net

WWW.GLEDHILL.NET

